


# The Race Car of Time Clocks, The Ultima 10 Has the Speed You Need.

Fully Customizable & Completely Secure Time Clock

## Workforce Data Collection Integration Flexibility

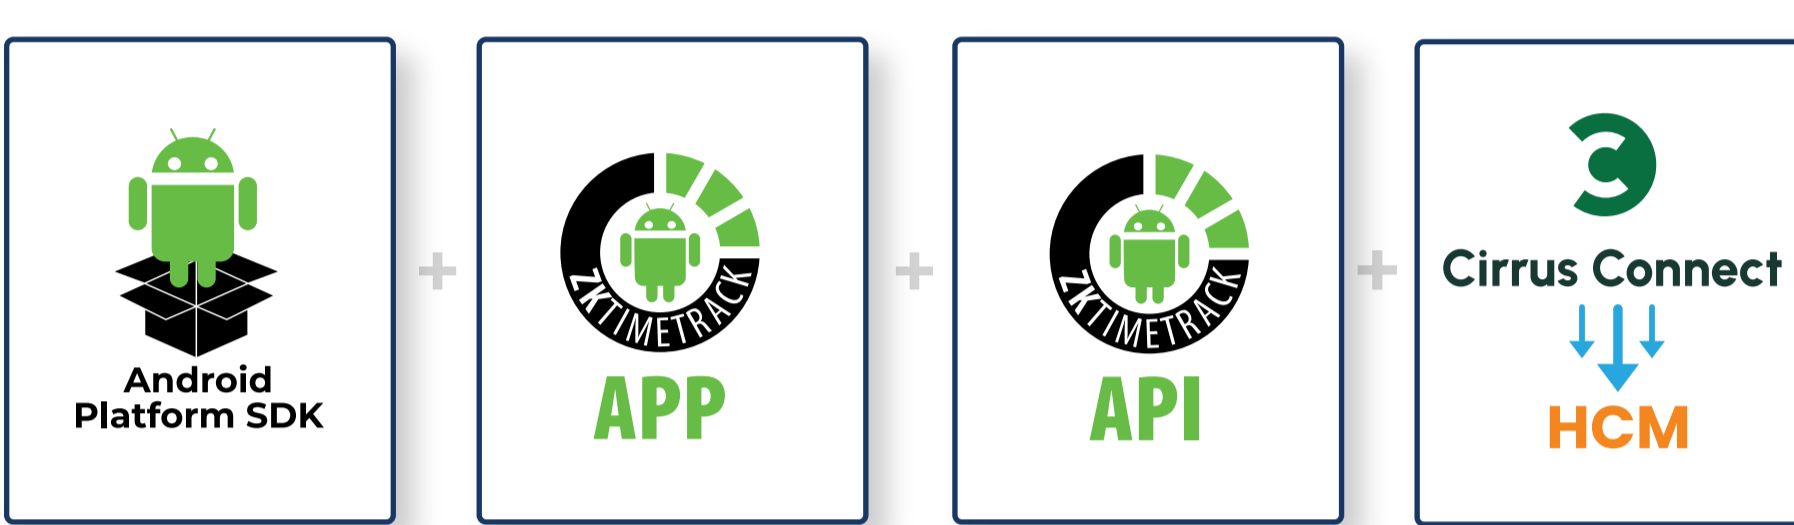

## Specifications

Features	Technical Specifications
<b>Processor</b>	8-core
<b>Display</b>	<ul style="list-style-type: none"> <li>10" TFT LCD Capacitive Touch Screen</li> <li>1920 x 1200 Resolution</li> <li>16:9 Aspect Ratio</li> </ul>
<b>System</b>	Android OS
<b>Memory</b>	2GB RAM; 16GB ROM
<b>Capacity</b>	Fingerprint Module: 20,000 FAM33 Face Module: Visible light = 20,000; Near-infrared = 6,000 Card: 10,000 Transaction: 1 Million
<b>Communication</b>	<ul style="list-style-type: none"> <li>Standard 10/100/1000 Mbps Ethernet</li> <li>Certified Wi-Fi Dual Band 2.4G/5G, 802.11 a/b/g/n/ac</li> <li>USB 2.0 Ports</li> <li>Wiegand</li> <li>PTCRB Certified 4G LTE</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>LED module: 1 (1 total)</li> <li>AUX Input: 2</li> <li>Wiegand Input: 2</li> <li>Relay: 2 (Alarm, Bell, External)</li> <li>Programmable LED indicator: 2 (4 total)</li> </ul>
<b>Environment</b>	Operating Temperature: 32° F to 113° F (0° C to 45° C) Operating Humidity: 5% to 80% non-condensing
<b>Dimensions</b>	Width Base: 10.19 in. (25.9 cm) Width with attached module: 10.19 in. (25.9 cm) Height: 8.11 in. (20.6 cm)

Features	Technical Specifications
<b>Biometric Technology</b>	FP (ZK): Touch-based optical fingerprint reader; high-performance live finger detection Facial: Infrared light facial biometric that can identify user in less than one second
<b>Audio</b>	<ul style="list-style-type: none"> <li>Speaker</li> <li>Microphone</li> </ul>
<b>Soft Keypad</b>	Capacitive Touch Screen
<b>Modular Technologies</b>	Barcode badge reader Magnetic stripe card reader RFID: EM4100 SERIES PROX CARDS <ul style="list-style-type: none"> <li>PASSIVE PROX/RFID responder</li> <li>Multi-frequency card reader; Multi-Card supports all major RFID standards for frequency ranges 125/134.2kHz and 13.56MHz, including NFC</li> </ul>
<b>Power</b>	AC Power Adaptor: 12V, 3.0A PoE (Power over Ethernet): PoE+ IEEE 802.3at Power Class Levels: 0~4 Maximum Current: 720 mA Voltage Range (at PSE): 50~57V DC Maximum Power (at PES): 30W Input Voltage (at PD): 48V Maximum Power (at PD): 30W  Battery: Voltage: 7.4V Capacity: 7600mAh Charge Voltage: 8.4V

© Copyright 2026. ZKTeco WFM is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved. v3.2 USP