


# Designed for **Small to Medium** Businesses

## **High-Quality, Budget-Friendly** Option

### To Effortlessly Manage Teams

#### Workforce Data Collection Integration Flexibility

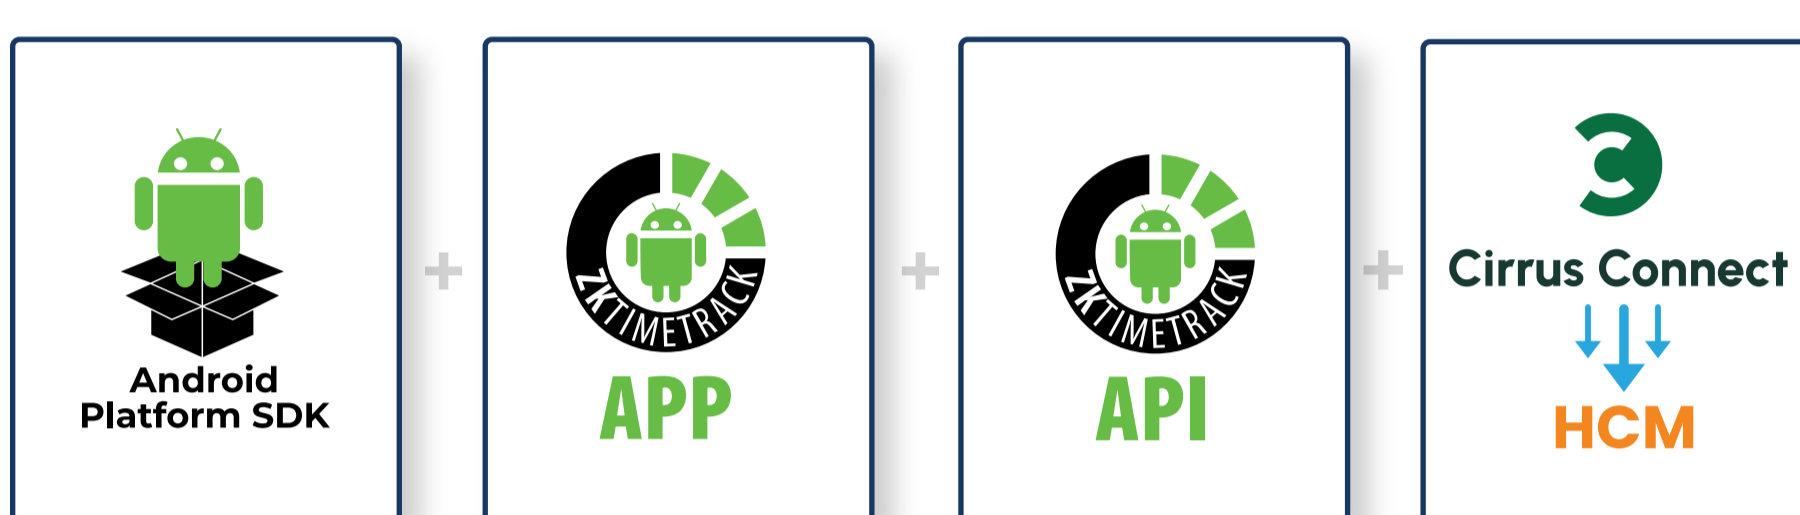

## Specifications

Features	Technical Specifications
<b>Processor</b>	8-core
<b>Display</b>	<ul style="list-style-type: none"> <li>5" TFT LCD Capacitive Touch Screen</li> <li>1280 x 720 Resolution</li> <li>16:9 Aspect Ratio</li> </ul>
<b>System</b>	Android OS
<b>Memory</b>	2GB RAM, 16GB ROM
<b>Capacity</b>	Fingerprint Module: 20,000 FAM33 Face Module: Visible light = 20,000; Dual Camera: Visible light = 1,000 FAM33 Palm Module: Visible light = 5,000 Card: 10,000 Transaction: 1 Million
<b>Communication</b>	<ul style="list-style-type: none"> <li>Standard 10/100 Mbps Ethernet</li> <li>Certified Wi-Fi Dual Band 2.4G/5G, 802.11 a/b/g/n/ac</li> <li>USB 2.0 Ports</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>Relay: 1 (Bell)</li> <li>Programmable LED indicator: 1</li> </ul>
<b>Environment</b>	Operating Temperature: 32° F to 113° F (0° C to 45° C) Operating Humidity: 5% to 80% non-condensing
<b>Dimensions</b>	Width Base with Cover Plate: 5.7 in. (19.6 cm) Height: 5.47 in. (13.9 cm) Depth: 2.13 in. (5.4 cm)

Features	Technical Specifications
<b>Biometric Technology</b>	FP: ZK Green Sensor ZK2750P  Facial Identification: FAM33 Module Visible Light Recognition by touchless Palm and Face in milliseconds  Dual Camera: Visible Light Recognition
<b>Audio</b>	<ul style="list-style-type: none"> <li>Speaker</li> <li>Microphone</li> </ul>
<b>Soft Keypad</b>	Capacitive Touch Screen
<b>Modular Technologies</b>	Barcode badge reader: N/A (Can be added but needs to meet MOQ)  Magnetic stripe card reader: N/A (Can be added but needs to meet MOQ)  RFID: EM4100 SERIES PROX CARDS  <ul style="list-style-type: none"> <li>PASSIVE PROX/RFID responder</li> <li>Multi-frequency card reader; Multi-Card supports all major RFID standards for frequency ranges 125/134.2kHz and 13.56MHz, including NFC</li> </ul>
<b>Power</b>	AC Power Adaptor: 12V, 1.5A  PoE (Power over Ethernet): Optional PoE+ IEEE 802.3at  Power Class Levels: 0~4 Maximum Current: 500 mA Voltage Range (at PSE): 50~57V DC Maximum Power (at PES): 30W Input Voltage (at PD): 48V Maximum Power (at PD): 30W

© Copyright 2026. ZKTeco WFM is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved. v3.2 USP