

The Best-In-Class Clock


Where the "P" Stands For Portable

And the 4G LTE Capability Makes It Possible



Workforce Data Collection

Integration Flexibility

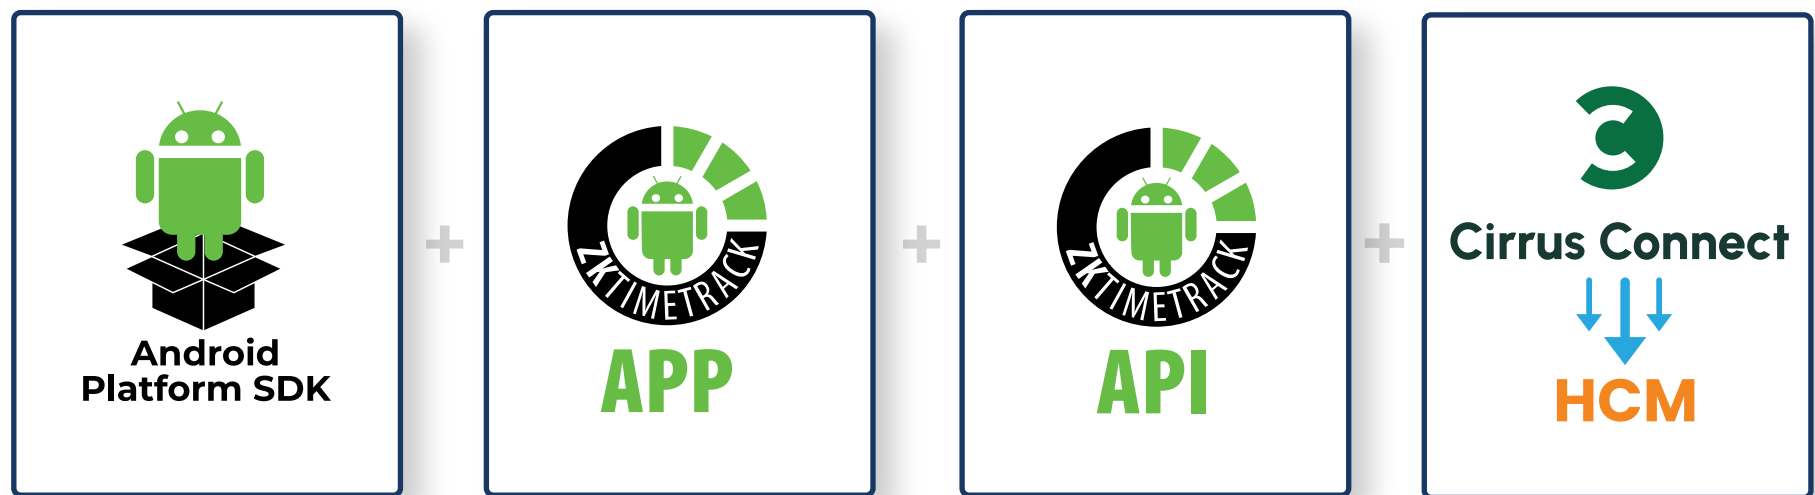

Specifications

Features	Technical Specifications
Processor	8-core
Display	7" TFT LCD Capacitive Touch Screen 1024 x 600 Resolution 16:9.6 Aspect Ratio
System	Android OS
Memory	2GB RAM, 16GB ROM, micro SD card slot
Capacity	Fingerprint Module: 20,000 FAM33 Face Module: Visible light = 20,000; Near-infrared = 6,000 FAM33 Palm Module: Visible light = 5,000 Card: 10,000 Transaction: 1 Million
Communication	- Standard 10/100/1000 Mbps Ethernet - Certified Wi-Fi Dual Band 2.4G/5G, 802.11 a/b/g/n/ac - USB 2.0 Ports - Wiegand - PTCRB Certified 4G LTE
Interface	- LED module: 1 - AUX Input: 2 - Wiegand Input: 2 - Relay: 2 (Alarm, Bell, External Lock) - Programmable LED indicator: 2
Environment	Operating Temperature: 14° F to 131° F (-10° C to 55° C) Operating Humidity: 5% to 80% non-condensing
Dimensions	Width Base: 9.21 in. (23.4 cm) Width fully configured: 9.72 in. (24.7 cm) Height: 5.28 in. (13.4 cm) Depth: 2.38 in. (6.05 cm)

Features	Technical Specifications
Biometric Technology	FP (ZK): Touch-based optical fingerprint reader Facial: Infrared light facial biometric that can identify user in less than one second. Visible Light Recognition: V5.9 with FAM33 Module Palm: FAM33 Module - Palm Support, Visible Light
Audio	Speaker, Microphone
Soft Keypad	Capacitive Touch Screen
Readers & Supported Card Technologies	RFID: EM4100 SERIES PROX CARDS - PASSIVE PROX/RFID responder - Multi-frequency card reader; Multi-Card supports all major RFID standards for frequency ranges 125/134.2kHz and 13.56MHz, including NFC
Power	AC Power Adaptor: 12V, 1.5A PoE (Power over Ethernet): PoE+ IEEE 802.3at Power Class Levels: 0~4 Maximum Current: 720 mA Voltage Range (at PSE): 50~57VDC Maximum Power (at PES): 30W Input Voltage (at PD): 48V Maximum Power (at PD): 30W Battery: Voltage: 7.4V Capacity: 7600mAh Charge Voltage: 8.4V Normal Charge: 8hrs Fast Charge: 5hrs

